

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 721 266 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

10.07.1996 Bulletin 1996/28

(51) Int Cl. 6: H04L 12/18

(21) Application number: 96300137.5

(22) Date of filing: 08.01.1996

(84) Designated Contracting States:  
DE FR GB

(72) Inventor: Bennett, Richard L.  
Holmdel, NJ 07733 (US)

(30) Priority: 09.01.1995 US 370514

(74) Representative: Robinson, Robert George et al  
International Intellectual Property Department,  
NCR LIMITED,  
915 High Road,  
North Finchley  
London N12 8QJ (GB)

(71) Applicant: NCR International, Inc.  
Dayton, Ohio 45479 (US)

### (54) Collaborative computer system

(57) In a collaborative computer network system, at least one of the computers (14,18) is connected to a voice telephone system. When a call is made from a first telephone (22) to a second telephone (22), the called and calling telephone numbers are converted to network addresses, thereby enabling a collaborative session to be established between a local and a remote computer (18), whereby a shared workspace (40) can be utilized by both the called and the calling parties.

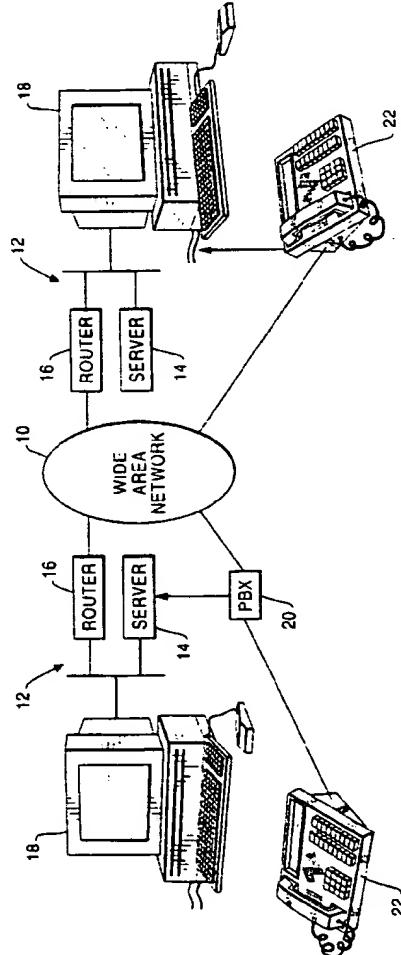


FIG. 1

EP 0 721 266 A2

**Description**

This invention relates to collaborative computer systems.

There is often a need to access computer programs during telephone conversations. Such telephone conversations may require the user to record the call in a telephone log, modify a database, or otherwise manipulate information in a computer.

Increasingly, there is a need for both the called and calling party to share a workspace in a computer network during the telephone call, in order to review or update shared information. However, while the mechanics for placing phone calls are simple and well known, the same cannot be said for the mechanics of setting up a shared workspace in a computer network.

It is an object of the present invention to provide a collaborative computer system adapted for simple operation, utilizing a voice telephone system.

Therefore, according to one aspect of the present invention, there is provided a method of managing a collaborative computer system including a plurality of computers connected in a network characterized by the steps of: connecting at least one of the computers to a voice telephone system, recognizing when a call is made to from a calling party to a called party through the voice telephone system; communicating identification information for the call from the voice telephone system to the connected computer, wherein the identification information identifies the calling and called parties; and establishing a shared workspace on the network between a first computer associated with the calling party and a second computer associated with the called party.

According to another aspect of the present invention, there is provided a collaborative computer system for managing shared workspaces, characterized by: one or more computers connected together in a network, wherein at least one of the computers is connected to a voice telephone system; means, performed by one of the computers, for recognizing when a call is made to from a first telephone identified by a calling number to a second telephone identified by a called number through the voice telephone system; means, for communicating identification information for the call from the voice telephone system to the connected computer, wherein the identification information identifies the calling and called numbers; and means, for establishing a shared workspace on the network between a first computer associated with the first telephone using the calling number and a second computer associated with the second telephone using the called numbers.

One embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a block diagram illustrating one possible embodiment of the hardware comprising the present invention;

Figure 2 is a flowchart diagram illustrating one possible method for controlling the display of information:

Figure 3 is a diagram illustrating an exemplary table associating telephone numbers with network addresses according to the present invention;

Figure 4 is a timing diagram that illustrates an exemplary call setup for the passive telephone monitor according to the present invention; and

Figure 5 is a diagram that illustrates how information is shared between the local and remote computers.

The present invention provides one concept for computer/telephone integration that unites personal computers and telephones for business purposes. The present invention allows two or more network users to share an application that has been established in response to the placing of a telephone call which operates in parallel with the sharing of the application. The present invention allows a user to establish computer sessions with the same level of transparency as the telephone itself. For example, when a person picks up the phone to place a call, that person does not think about the mechanics of establishing an electrical connection via the telephone. The present invention accomplishes the same thing in establishing shared workspaces between users, and thereby minimize the effort involved in establishing such workspaces. Thus, the present invention is a very transparent communication device for sharing data on a computer network in parallel with a telephone conversation. It is preferred that the shared data be multimedia data and that the user be able to watch changes being made to that shared workspace by the other user in real time.

Figure 1 is a block diagram illustrating one possible embodiment of the hardware comprising the present invention. The present invention is typically incorporated into a wide area computer network 10. The wide area network 10 includes one or more local area networks 12 comprised of servers 14, wherein the local area networks 12 are coupled into the wide area network 10 via routers 16 in a manner well known in the art. The local area networks 12 are comprised of one or more personal computers 18 coupled to their respective local servers 14. The environment of the present invention also includes a voice telephone system comprising at least one switch or PBX 20 controlling the operations of telephones 22 belonging to users of the wide area network 10. In the preferred embodiment, there exists at least one physical link between the PBX 20 and at least one of the servers 14 in the wide area network 10. Also in the preferred embodiment, the server 14 passively monitors the link with the PBX 20. The word "passive" implies that the PBX (on behalf of the phone user) is in control of the session setup and that the computer network passively follows the PBX based on the information it monitors from the PBX. However, those skilled in the art will

recognize that the server 14 could actively control the link with the PBX 20 instead. An active computer network would, based on user selection of a certain person in an address book application executed thereon, direct the PBX to establish a phone session.

Figure 2 is a flowchart illustrating one possible embodiment of the steps performed by the present invention. Block 24 represents the PBX 20 receiving a request to place a call between at least two of the telephones 22 coupled thereto, which request initiates actuation of the present invention. Block 26 represents information about the call being transmitted from the PBX 20 to the server 14. Preferably, the information received by the server 14 from the PBX 20 would comprise automatic number identification (ANI) or similar type information that identifies both the called and calling numbers. Block 28 represents the server 14 mapping the called and calling numbers to the network addresses of the associated personal computers 18. Figure 3 is a block diagram illustrating an exemplary table associating PBX 20 extension numbers 32 for the telephones 22 with Ethernet™ or Internet or other network addresses 34 for the personal computers 18, so that a user would be identified by both values. Referring again to Figure 2, block 30 represents the server 14 initiating a session between the personal computers 18 on the wide area network 10 identified by the called and calling number, so that the associated computers 18 access a shared workspace across the wide area network 10.

Figure 4 is a timing diagram that illustrates an exemplary call setup for the passive telephone monitor according to the present invention. Initially, the local and remote users login into their respective local and remote computers and enable their respective passive telephone monitors. The local user then places a telephone call through the voice telephone system to the remote user, who answers the telephone call. At the same time, the remote computer receives the ANI information from the voice telephone system, and maps the ANI information to a network address. Then, the remote computer establishes a session across the computer network to the local computer's passive telephone monitor (or vice versa). Both the local and remote computers present an initial shared workspace to their respective users using the displays attached to their respective computers. Thereafter, the local and remote users can share information by dragging, dropping or pasting information into windows displayed on their respective local and remote computers that represents the shared workspace.

Figure 5 is a block diagram that illustrates how information is shared between the local and remote computers 18. A monitor 36 displays one or more windows 38 and 40 under the control of a windowing graphical user interface, such as Microsoft Windows 3.1. A first window 38 may display information from a completely local application, such as a spreadsheet. A second window 40 may display information from the shared workspace with the remote computer 18. The arrow 42 be-

tween the first window 38 and second window 40 represents the local user sharing information from the local application in the first window 38 with the remote user by dragging, dropping or pasting the information into the second window 40 displaying information from the shared workspace with the remote computer 18. The same steps can be performed by the remote user as well.

In the present invention, each of the computers 18 forms part of a collaborative system, wherein the calling party's computer 18 interacts with one or more called party's computer 18. The collaborative system simultaneously replicates selected windows displayed on the calling party's computer 18 at one or more called party's computer 10. This replication allows the users to share workspace areas on the wide area network 10. Note that it is possible for both the called party's computer 18 and the calling party's computer 18 to run a plurality of other applications at the same time because of the multi-tasking capabilities of the operating environment.

The present invention preferably utilizes the Telephony Services Application Programming Interface (TSAPI) developed by Novell, Inc. and AT&T Corporation. The TSAPI focuses on call control to enable computers 18 (including servers 14) to control dialling, answering, transferring and conferencing of telephone calls. In addition, the TSAPI can control PBXs 20, switches and digital phones 22. With TSAPI, the connection from the phone 22 to the file server 14 or personal computer 18 is logical, not physical. When the user logs in, the server 14 creates a mapping between the user's personal computer 18 address and phone 22 address. That association synchronizes the flow of data on the wide area network 10 with the flow of telephone calls on the PBX 20.

In summary, the present invention discloses a method and apparatus for using a passive telephone monitor to control collaborative systems comprising one or more local computers connected to one or more remote computers, wherein an image displayed on the local computer is substantially simultaneously displayed on the remote computer.

The following paragraph describes some alternative ways of accomplishing the present invention. Those skilled in the art will recognize that the present invention could be used with any type of computer, and need not be limited to a personal computer. Those skilled in the art will recognize that different networks and operating systems could be used with the present invention described herein. Those skilled in the art will recognize that various forms of communication links between computers could be used with the present invention. Those skilled in the art will recognize that the present invention could be used any type of display interface. Those skilled in the art will recognize that alternate approaches to capturing or intercepting telephony events could be substituted for the approach described herein. Those skilled in the art will recognize that the present invention

need not be limited to configurations where a PBX is involved and as long as an interface exist between the voice telephone network that can provide calling/called number information to a server, then the same effect can be achieved. Those skilled in the art will recognize that the present invention could be used with more than two parties and that conference calls and work spaces shared between any number of parties could be achieved using the present invention.

### Claims

1. A method of managing a collaborative computer system including a plurality of computers (14,18) connected in a network (10,12), characterized by the steps of: connecting at least one of the computers (14,18) to a voice telephone system, recognizing when a call is made to from a calling party to a called party through the voice telephone system; communicating identification information for the call from the voice telephone system to the connected computer (14,18), wherein the identification information identifies the calling and called parties; and establishing a shared workspace (40) on the network (10,12) between a first computer (18) associated with the calling party and a second computer (18) associated with the called party. 15
2. A method according to claim 1, characterized in that the identification information comprises automatic number identification identifying the calling and called parties. 20
3. A method according to claim 1 or claim 2, characterized by the step of mapping phone numbers associated with the calling and called parties to corresponding network addresses of the first and second computers (18). 25
4. A method according to claim 3, characterized in that the mapping step comprises the step of accessing a table on the connected computer (14,18) associating network addresses for the first and second computers (18) with extension numbers for the calling and called parties. 30
5. A method according to any one of the preceding claims, characterized by the step of replicating selected information displayed on the first computer (18) at the second computer (18); and of replicating selected information displayed on the second computer (18) at the first computer (18). 35
6. A collaborative computer system for managing shared workspaces, characterized by: one or more computers (14,18) connected together in a network (10,12), wherein at least one of the computers is 50
7. A system according to claim 6, characterized in that the identification information comprises automatic number identification identifying the calling and called numbers. 55
8. A system according to claim 6 or claim 7, characterized in that one of the computers (14,18) further comprises means for mapping the calling and called numbers to corresponding network addresses of the first and second computers (18).
9. A system according to claim 8, characterized in that the means for mapping comprises means for accessing a table on one of the computers (14,18) to associate the network addresses for the first and second computers (18) with the calling and called numbers.
10. A system according to any one of claims 6 to 9, characterized in that the means for establishing further comprises means for initiating a session between the first and second computers (18) on the network (10,12) associated with the calling and called numbers, so that the first and second computers (18) access the shared workspace (40) across the network. 60
11. A system according to claim 10, characterized by means for replicating selected information displayed on the first computer (18) at the second computer (18); and means for replicating selected information displayed on the second computer (18) at the first computer (18). 65

connected to a voice telephone system; means performed by one of the computers (14,18), for recognizing when a call is made to from a first telephone (22) identified by a calling number to a second telephone (22) identified by a called number through the voice telephone system; means for communicating identification information for the call from the voice telephone system to the connected computer (14,18), wherein the identification information identifies the calling and called numbers; and means for establishing a shared workspace (40) on the network (10,12) between a first computer (18) associated with the first telephone (22) using the calling number and a second computer associated with the second telephone (22) using the called numbers.

7. A system according to claim 6, characterized in that the identification information comprises automatic number identification identifying the calling and called numbers.


8. A system according to claim 6 or claim 7, characterized in that one of the computers (14,18) further comprises means for mapping the calling and called numbers to corresponding network addresses of the first and second computers (18).


9. A system according to claim 8, characterized in that the means for mapping comprises means for accessing a table on one of the computers (14,18) to associate the network addresses for the first and second computers (18) with the calling and called numbers.

10. A system according to any one of claims 6 to 9, characterized in that the means for establishing further comprises means for initiating a session between the first and second computers (18) on the network (10,12) associated with the calling and called numbers, so that the first and second computers (18) access the shared workspace (40) across the network.

11. A system according to claim 10, characterized by means for replicating selected information displayed on the first computer (18) at the second computer (18); and means for replicating selected information displayed on the second computer (18) at the first computer (18).


FIG. 1

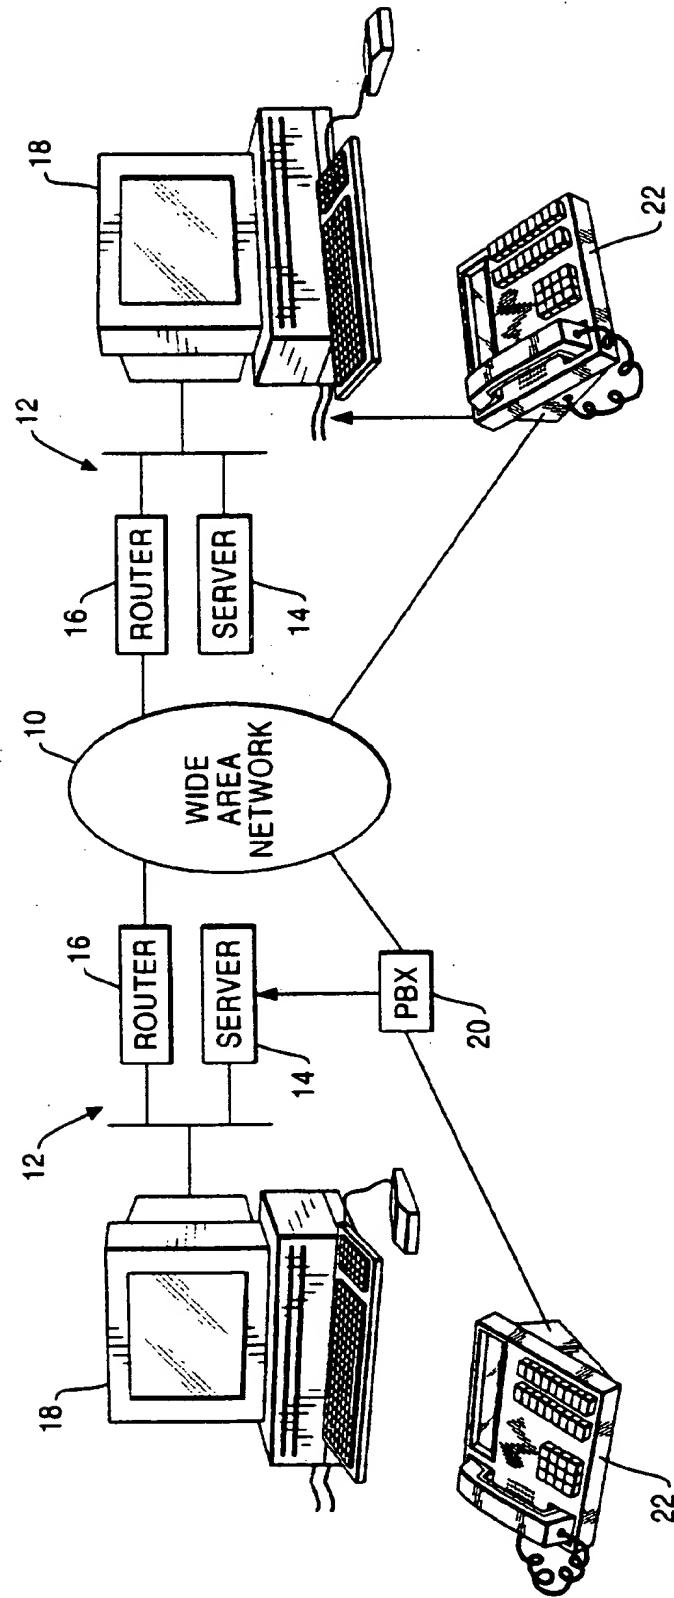

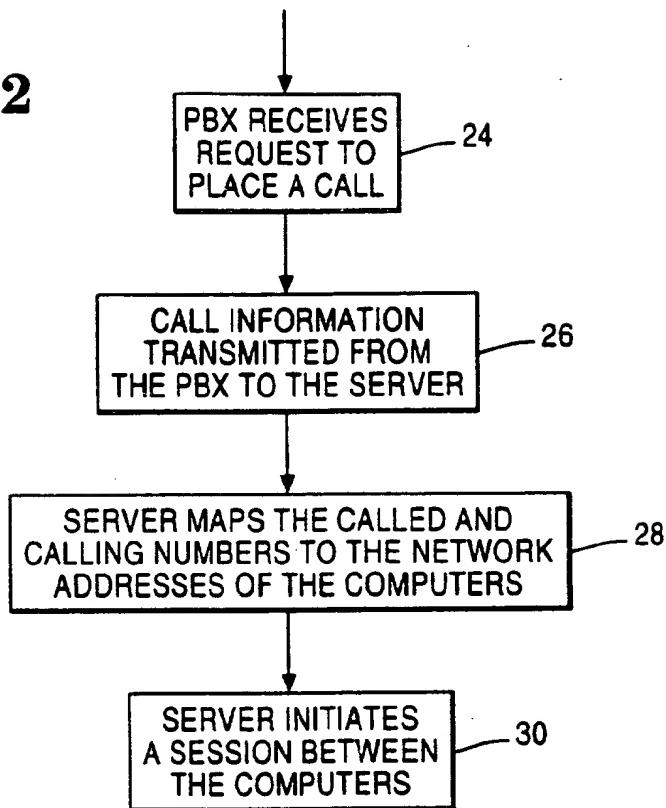
**FIG. 2****FIG. 3**

PHONE NUMBER #1	NETWORK ADDRESS #A
PHONE NUMBER #2	NETWORK ADDRESS #B
• • • •	• • • •
PHONE NUMBER #9	NETWORK ADDRESS #I

The table maps nine phone numbers to their corresponding network addresses. Column 1 is labeled "PHONE NUMBER #1" and "PHONE NUMBER #2". Column 2 is labeled "NETWORK ADDRESS #A" and "NETWORK ADDRESS #B". Between the second and third rows, there are four dots in each column, indicating intermediate entries. The last row contains "PHONE NUMBER #9" and "NETWORK ADDRESS #I". Reference numerals 32 and 34 point to the top edge of the first column and the top edge of the second column respectively.

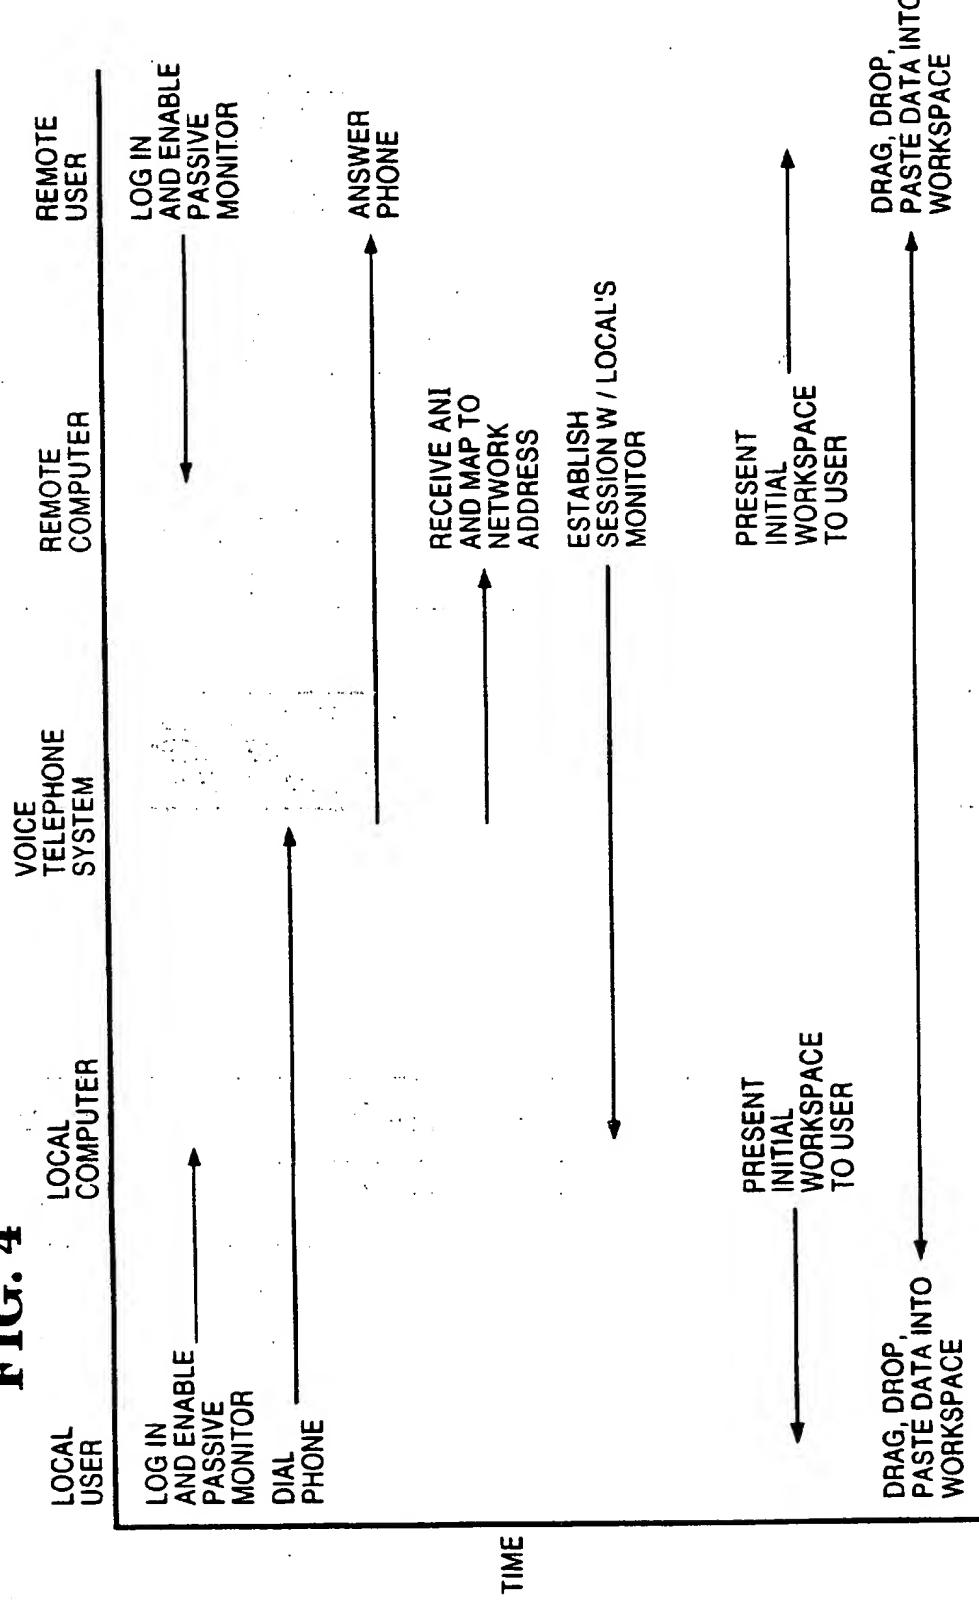**FIG. 4**

**FIG. 5**

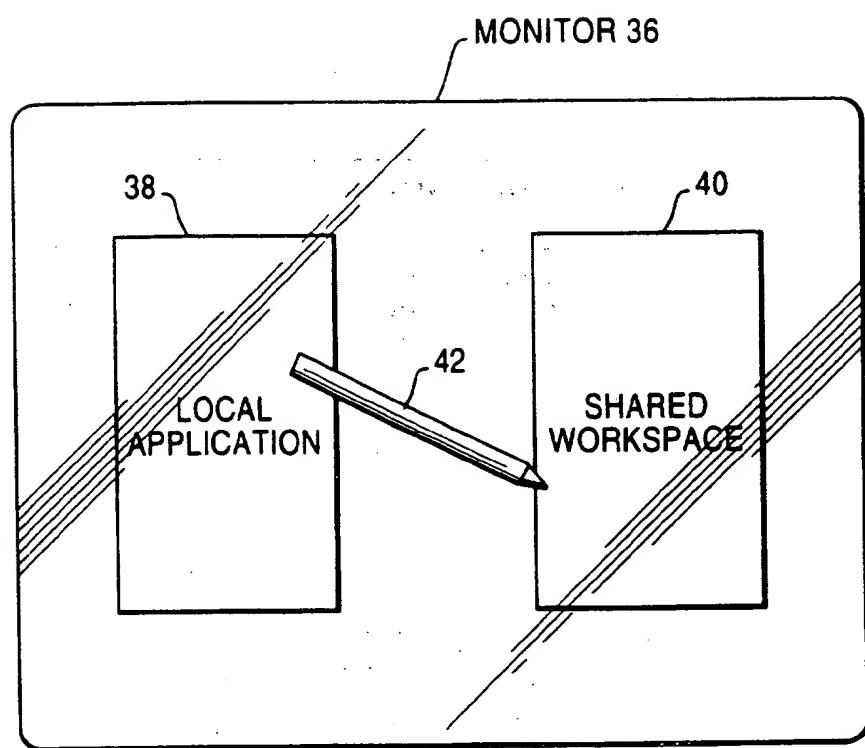

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11)



EP 0 721 266 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
22.11.2000 Bulletin 2000/47

(51) Int Cl. 7: H04L 12/18

(43) Date of publication A2:  
10.07.1996 Bulletin 1996/28

(21) Application number: 96300137.5

(22) Date of filing: 08.01.1996

(84) Designated Contracting States:  
DE FR GB

(72) Inventor: Bennett, Richard L.  
Holmdel, NJ 07733 (US)

(30) Priority: 09.01.1995 US 370514

(74) Representative: Cleary, Fidelma et al  
International IP Department  
NCR Limited  
206 Marylebone Road  
London NW1 6LY (GB)


(71) Applicant: NCR International, Inc.  
Dayton, Ohio 45479 (US)

### (54) Collaborative computer system

(57) In a collaborative computer network system, at least one of the computers (14,18) is connected to a voice telephone system. When a call is made from a first telephone (22) to a second telephone (22), the called

and calling telephone numbers are converted to network addresses, thereby enabling a collaborative session to be established between a local and a remote computer (18), whereby a shared workspace (40) can be utilized by both the called and the calling parties.

FIG. 1

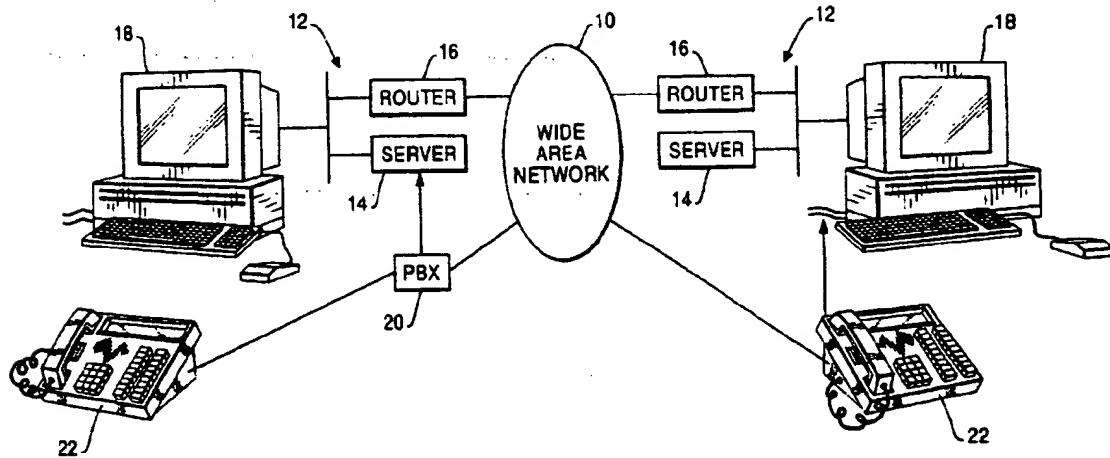

EP 0 721 266 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 0137

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 377 392 A (IBM) 11 July 1990 (1990-07-11) * abstract *	1-4,6-9	H04L12/18
A	---	5,10,11	
A	US 5 208 912 A (NAKAYAMA YOSHIYUKI ET AL) 4 May 1993 (1993-05-04) * column 2, line 29 - column 4, line 37 *	1,5,6,11	
A	EP 0 581 528 A (AMERICAN TELEPHONE & TELEGRAPH) 2 February 1994 (1994-02-02) * column 1, line 29 - line 40 * * column 3, line 19 - line 28 * * column 3, line 50 - column 4, line 11 *	1,2,6,7	
A	WO 94 24803 A (AT & T CORP) 27 October 1994 (1994-10-27) * abstract *	1,6	
-----			
TECHNICAL FIELDS SEARCHED (Int.Cl.6)			
H04L H04M G06F H04Q			
The present search report has been drawn up for all claims			
Place of search  BERLIN	Date of completion of the search  21 September 2000	Examiner  Tous Fajardo, J	
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons B : member of the same patent family, corresponding document			

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 96 30 0137

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
 The members are as contained in the European Patent Office EDP file on  
 The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-09-2000

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 0377392 A	11-07-1990	US 4943996 A		24-07-1990
		DE 68927992 D		28-05-1997
		DE 68927992 T		23-10-1997
		JP 2205160 A		15-08-1990
-----				
US 5208912 A	04-05-1993	JP 2791146 B		27-08-1998
		JP 3157029 A		05-07-1991
-----				
EP 0581526 A	02-02-1994	US 5301246 A		05-04-1994
		CA 2099949 A		30-01-1994
		JP 6209382 A		26-07-1994
-----				
WO 9424803 A	27-10-1994	US 5689553 A		18-11-1997
		AU 687057 B		19-02-1998
		AU 6706094 A		08-11-1994
		BR 9406459 A		30-01-1996
		CA 2160894 A		27-10-1994
		CN 1121757 A		01-05-1996
		EP 0695488 A		07-02-1996
		JP 8511916 T		10-12-1996
		NZ 265810 A		19-12-1997
		NZ 328977 A		19-12-1997
		NZ 328978 A		19-12-1997
-----				

This page Blank (uspto)